

## Split System Submittal Data

Indoor: **CS-MKE9NB4U**

Multi System Indoor Units - Ceiling Recessed

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit#: \_\_\_\_\_  
 Drawing#: \_\_\_\_\_



General Data	
<b>Power [V/P/Hz]</b>	<b>208 - 230/1/60</b>
Circuit Ampacity [A]	N/A
Fuse Size, Max.[A]	15
Running Amps [A]	COOL .11 / .1 HEAT .13 / .12
Power Input (W)	COOL 15 / 16 HEAT 17 / 18
<b>Indoor Unit</b>	<b>Cool/Heat</b>
Fan type	Turbo
Dia & Length (in.) - No. Speeds	D12-5/8 L5-3/4 -1
No. Speeds	3 & Auto
No. Poles [RPM, High]	8 - 440/490
No. Motors [W]	1-[23]
CFM [HI]	221/247
Operation Sound (HI/Med/Lo)	33/32/31-34/33/32
<b>Coil Type</b>	<b>Aluminum Plate Fin &amp; Copper Tube</b>
Fin Type - Pipe Type	Aluminum - Copper
Rows - F.P.I.	2 - 18.1
Face Area (sq.ft.)	2.94
Tube Size (in)	N/A
Drain Connection Size	3/4
<b>Refrigerant</b>	<b>R410A</b>
Line Size (in. O.D. Discharge)	1/4" (Flare)
Line Size (in. O.D. Suction)	3/8" (Flare)
<b>Dimensions (HxWxD)</b>	
Indoor Unit (Crated) (in.)	11-13/32 x 24-13/16 x 28-1/8
Indoor Unit (Uncrated) (in.)	12-5/16 x 24-19/32 x 24-19/32
<b>Weight (lbs.)</b>	
Net	35.3
Shipping	41.9
<b>Shipping Volume (cu.ft.)</b>	4.59

### Performance Data @ ARI Standard Conditions (230V)

Cooling	
Total Capacity (BTU/H)	9000
Moisture Removal (HI, Pint/H)	3.4

Heating	
Total Capacity (BTU/H)	12,300



Features	
Controls	Microprocessor
Remote Control	LCD Wirelss Built-in Temp Sensor
Temperature Control	IC Thermostat
Timer	24 Hr. Program, 1 Hr. Off
Night Setback	Built-In
Air Louver	Automatic
Power Failure Automatic Restart	Built-In
Self-Diagnosis	Built-In
Quiet Operation	Built-In
Air Filter	Washable, Anti-Mold

Option	
Refrigerant Line Set	Available
Fresh Air Intake	Knock-out
Air duct Extension	N/A
Condensate Drain Pump	Standard
Hard Wired Remote Controller	Available
Non-Removeable Remo-con Bracket	Available






Operating Range	Indoor Air Intake Temp	Outdoor Air Intake Temp
Cooling (Max)	95F DB/71F WB	115F DB
Cooling (Min)	67F DB/57F WB	14F DB
Heating (Max)	80 F DB / 67 F WB	75 F DB / 65 F WB
Heating (Min)	- DB / - WB	

# Indoor Dimensions


①	Air intake
②	Discharge outlet
③	Refrigerant tubing (liquid tube) dia. 1/4" (flared)
④	Refrigerant tubing (gas tube) dia. 1/2" (flared)
⑤	Drain tube connection port VP20 (outer dia. 1")
⑥	Power supply port
⑦	Suspension bolt hole (4 - 1/2" x 1-1/8" hole)
⑧	Fresh air intake duct connection port (dia. 3-7/8")

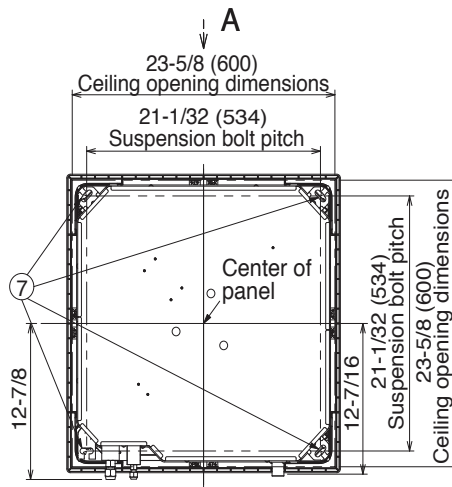

A View

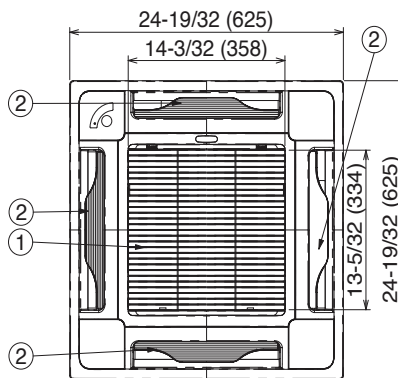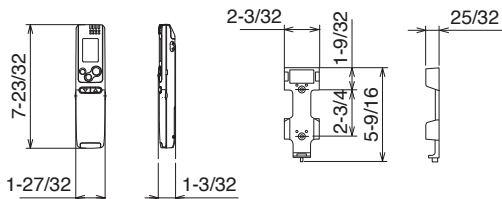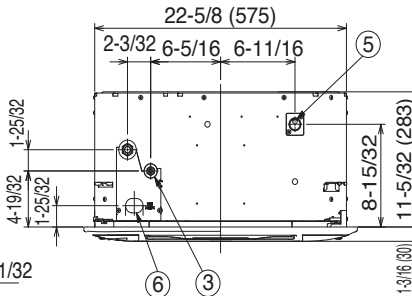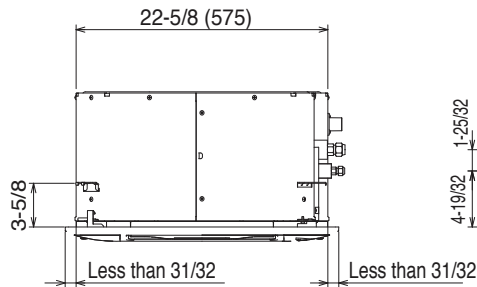

The length of the suspension bolts should be selected so that there is a gap of 1-3/16" or the ceiling (21/32" or more below the lower surface of the main unit), as shown in the figure at right. If the suspension bolts is too long, it will contact the ceiling panel and the unit cannot be installed.



Unit : inch (mm)

**Panasonic**

Panasonic North America  
Air Conditioning Division  
1690 Roberts Blvd., NW, Suite 110  
Kennesaw, GA 30144  
<http://www.panasonic.com/aircon>